

MERITOR® MG1A STANDARD FRICTION MATERIAL




MERITOR
RUN WITH THE BULL




IDEAS DRIVING RESULTS


ENGINEERED TO MEET THE
PERFORMANCE DEMANDS REQUIRED
FOR AUSTRALIAN ROAD CONDITIONS.

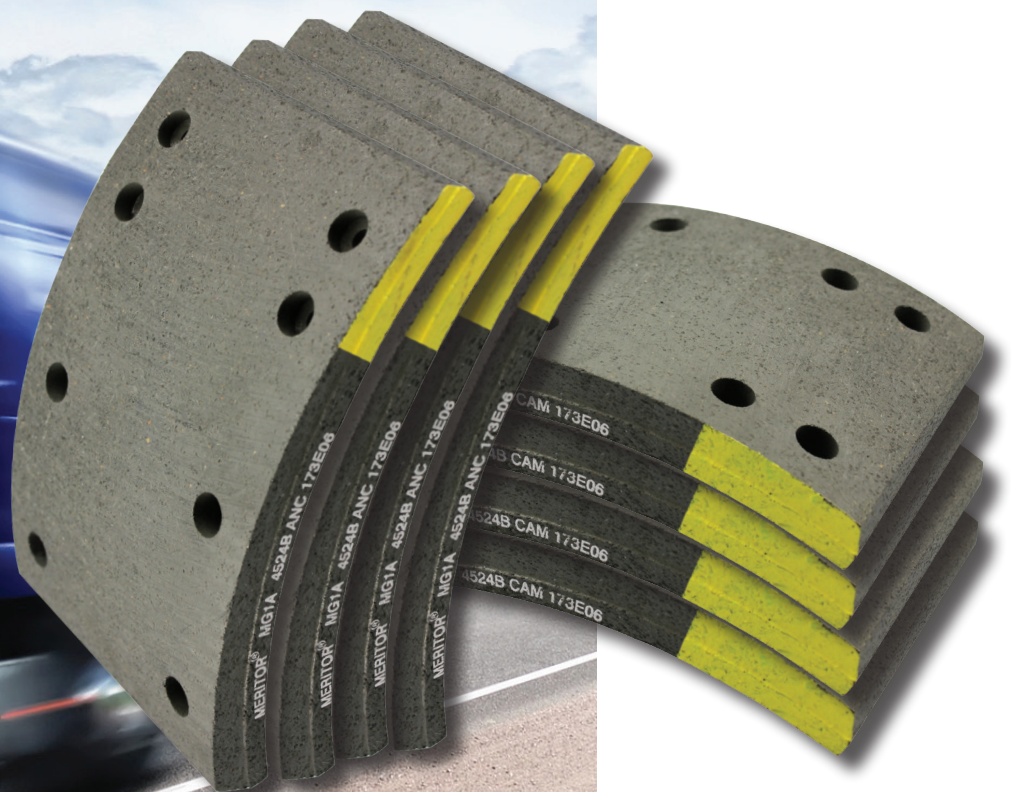


MG1A RETARDATION FORCE

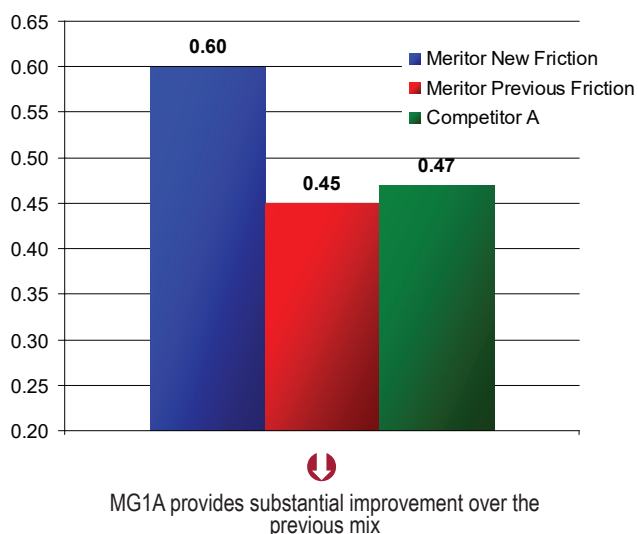

MG1A BRAKE POWER (FADE)

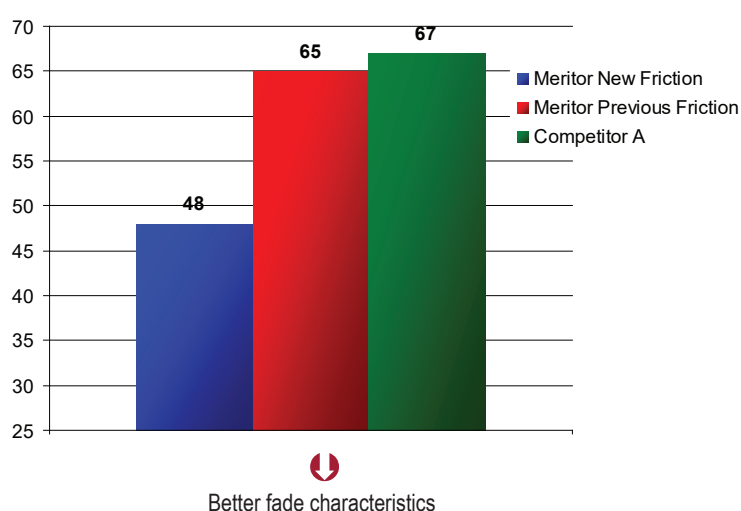

MG1A RECOVERY

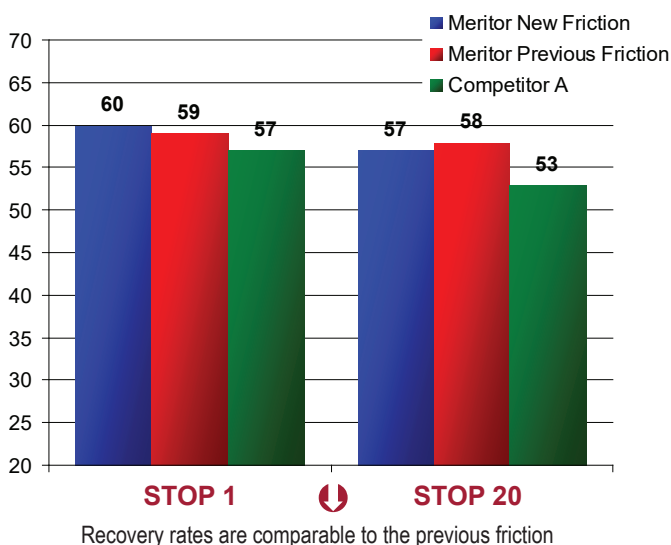

TECHNICAL DATA	
Brake:	16 1/2" x 7" Meritor S Cam
Normal Friction:	.429
Hot Friction:	.443

FEATURES AND BENEFITS

- Exceptional stopping power
- Excellent fade and recovery characteristics providing outstanding reliability and durability
- Delivers excellent performance over a wide range of S-cam and wedge brake applications on trucks, tractors and trailers
- Recognised as a dependable, long lasting and versatile performer at a competitive price
- Delivers a level of durability and stability normally found only in higher cost friction
- MG1A lining is a glass fibre based medium friction, non asbestos material
- Meets the inertial dynamometer requirement of the FMVSS 121 brake standard